

## Intelligent LED Driver (Constant Current)


- Housing made from SAMSUNG/COVESTRO's V0 flame retardant PC materials.
- Ultra small, thin and lightweight, screwless end cap.
- Change the output current, DMX address and other parameters via the APP.
- Adjustable output current with 1mA step.
- Support RDM protocol.
- Soft-on and fade-in dimming function enhances your visual comfort.
- T-PWM™ super deep dimming technology, 0.01% dimming depth.
- The whole dimming process is flicker-free with high frequency exemption level.
- Comply with the EU's ErP Directive, networked standby<0.5W.
- When there is no load, the output will be 0V to prevent damage to LEDs due to poor contact.
- Overheat, over voltage, overload, short circuit protection and automatic recovery.
- Suitable for Class I / II / III indoor light fixtures.
- Normal service life can reach 100,000 hours.
- 5-year warranty (Rubycon capacitor).



**T-PWM™**  
Dimming Technology

**Flicker Free**  
IEEE 1789

Dimmable: **NFC** Programmable  
10000 : 1

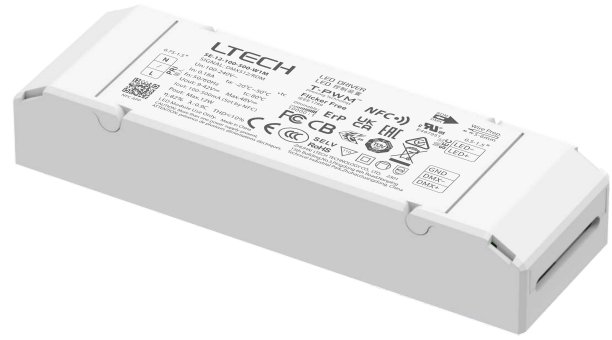


## Technical Specs

| Model                 | SE-12-100-500-W1M                 |  |  |  |
|-----------------------|-----------------------------------|--|--|--|
| Features              | Output Type                       | Constant current   |  |  |
|                       | Dimming Interface                 | DMX512/RDM   |  |  |
|                       | Output Feature                    | Isolation  |  |  |
|                       | Protection Grade                  | IP20   |  |  |
|                       | Insulation Grade                  | Class II (Suitable for class I / II / III light fixtures)  |  |  |
| OUTPUT                | Output Voltage                    | 9-42Vdc  |  |  |
|                       | Maximum output voltage            | ≤48Vdc   |  |  |
|                       | Output Current Range              | 100-500mA  |  |  |
|                       | Output Power Range                | 0.9W-12W   |  |  |
|                       | Dimming Range                     | 0~100%, down to 0.01%  |  |  |
|                       | LF Current Ripple                 | <3%(Maximum current for non dimming state)   |  |  |
|                       | Current Accuracy                  | ±5%  |  |  |
|                       | PWM Frequency                     | ≤3600Hz  |  |  |
| INPUT                 | DC Voltage Range                  | 100-240Vdc   |  |  |
|                       | AC Voltage Range                  | 100-240Vac   |  |  |
|                       | DC current range                  | 0.06-0.16A   |  |  |
|                       | Input Voltage                     | 115Vac/230Vac  |  |  |
|                       | Frequency                         | 0/50/60Hz  |  |  |
|                       | Input Current                     | ≤0.18A/115Vac, ≤0.08A/230Vac   |  |  |
|                       | Power Factor                      | PF>0.95/115Vac (at full load), PF>0.9C/230Vac (at full load)   |  |  |
|                       | THD                               | THD<10%/230Vac, at full load   |  |  |
|                       | Efficiency (Typ.)                 | 84%@300mA(at full load), 82%@500mA(at full load)   |  |  |
|                       | Inrush Current                    | Cold start 15A[Test twidth=102us tested under 50% Ipeak]/230Vac  |  |  |
|                       | Anti Surge                        | L-N: 2KV   |  |  |
| Leakage Current       | Max. 0.5mA                        |  |  |  |
| ENVIRONMENT           | Working Temperature               | ta: -20 ~ 50°C tc: 80°C  |  |  |
|                       | Working Humidity                  | 20 ~ 95%RH, non-condensing   |  |  |
|                       | Storage Temperature/Humidity      | -40 ~ 80°C/10-95%RH  |  |  |
|                       | Temperature Coefficient           | ±0.03%/°C(0-50°C)  |  |  |
|                       | Vibration                         | 10~500Hz, 2G 12min/1cycle, 72 min for X, Y and Z axes respectively   |  |  |
| PROTECTION            | Overload Protection               | Automatically protect the device when the load exceeds 102% of the rated power. Automatically recover once load is reduced |  |  |
|                       | Overheat Protection               | Intelligently adjust or turn off the current output if the PCB temperature ≥110°C.   |  |  |
|                       | Overvoltage Protection            | Automatically protect the device when voltage exceeds the no-load voltage. It can be recovered automatically               |  |  |
|                       | Short Circuit Protection          | Enter hiccup mode if short circuit occurs, and recover automatically   |  |  |
|                       | SAFETY & EMC                      | Withstand Voltage  | I/P-O/P: 3750Vac                                       |  |
| Insulation Resistance |                                   | I/P-O/P: 100MΩ/500VDC/25°C/70%RH   |  |  |
| Safety Standards      |                                   | CCC  | China  | GB19510.1, GB19510.14  |
|                       |                                   | TUV  | Germany  | EN61347-1, EN61347-2-13, EN62493                                   |
|                       |                                   | CB   | CB Member States                                       | IEC61347-1, IEC61347-2-13  |
|                       |                                   | CE   | European Union   | EN61347-1, EN61347-2-13, EN62384                                   |
|                       |                                   | KC   | Korea  | KC61347-1, KC61347-2-13  |
|                       |                                   | EAC  | Russia   | IEC61347-1, IEC61347-2-13  |
|                       |                                   | RCM  | Australia  | AS 61347-1, AS 61347-2-13  |
|                       |                                   | ENEC   | Europe   | EN61347-1, EN61347-2-13, EN62384                                   |
|                       |                                   | UKCA   | Britain  | BS EN 61347-1, BS EN 61347-2-13, BS EN 62493                       |
|                       |                                   | BIS  | India  | IS 15885 (PART 2/SEC 13)   |
| CUL                   |                                   | Canada   | CSA C22.2 NO.250.13                                    |  |
| UL                    |                                   | America  | UL 8750  |  |
| EMC Emission          |                                   | CCC  | China  | GB/T17743, GB17625.1   |
|                       |                                   | CE   | European Union   | EN55015, EN61000-3-2, EN61000-3-3, EN61547                         |
|                       |                                   | KC   | Korea  | KSC 9815, KSC 9547   |
|                       |                                   | EAC  | Russia   | IEC62493, IEC61547, EH55015  |
|                       |                                   | RCM  | Australia  | EN55015, EN61000-3-2, EN61000-3-3, EN61547                         |
|                       |                                   | UKCA   | Britain  | BS EN IEC 55015, BS EN IEC 61000-3-2, BS EN 61000-3-3, BS EN 61547 |
|                       | CUL                               | Canada   | ICES-005   |  |
|                       | UL                                | America  | FCC PART 15B   |  |
| EMC Immunity          | EN61000-4-2,3,4,5,6,8,11, EN61547 |  |  |  |
| ErP                   | Power Consumption                 | Networked standby  | <0.5W (After shutdown by command)                      |  |
|                       |                                   | No-load power consumption  | <0.5W (When the lamp is not connected)                 |  |
|                       | Flicker/Stroboscopic Effect       | IEEE 1789  | Meet IEEE 1789 standard/High frequency exemption level |  |
|                       |                                   | CIE SVM  | Pst LM<1.0, SVM<0.4                                    |  |
| DF                    | Phase factor                      | DF≥0.9   |  |  |
| OTHERS                | Weight(N.W.)                      | 85g±10g  |  |  |
|                       | Dimensions                        | 110×35×20mm(L×W×H)   |  |  |

## Product Size

Unit: mm

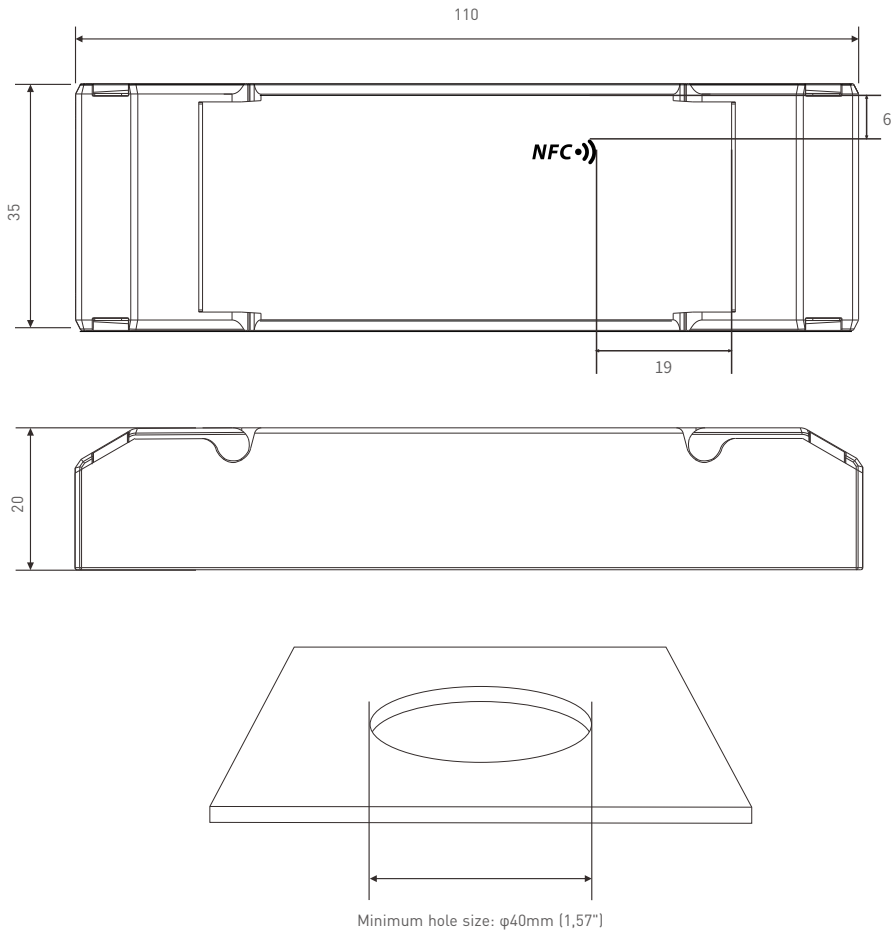

## Wiring Diagram


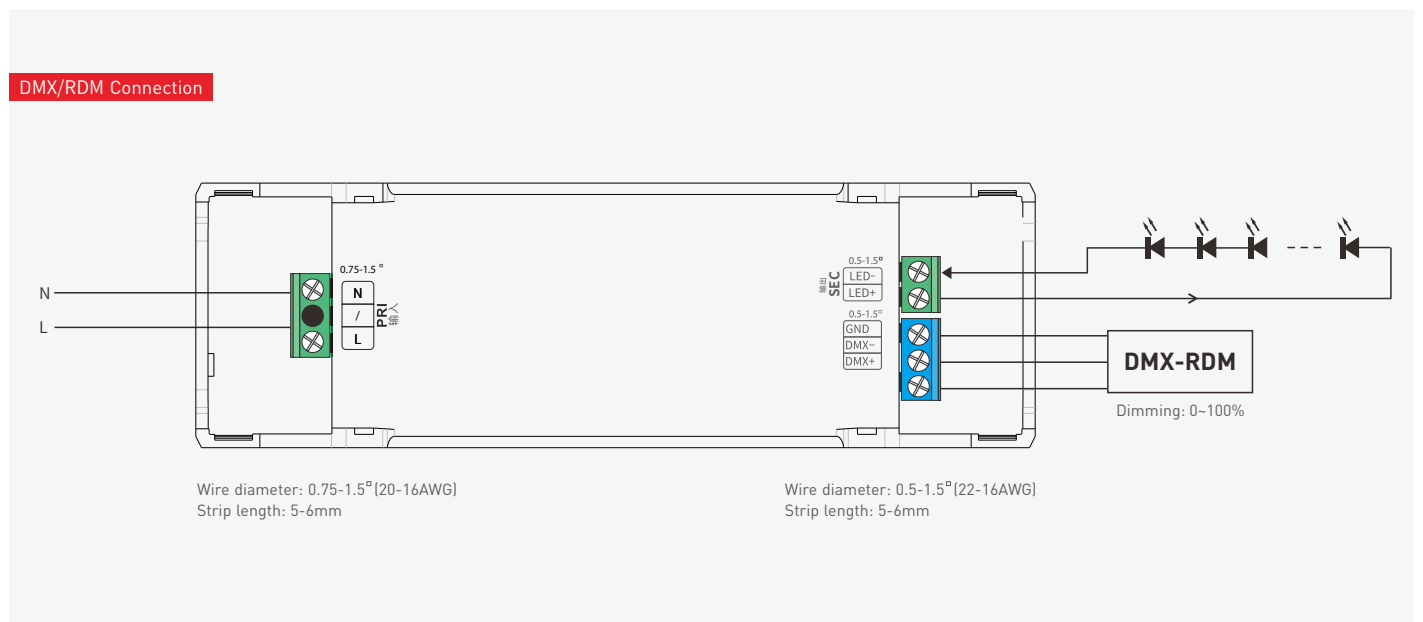


Table of Typical Corresponding Parameters for Current


The typical 9 current data sets below are for reference when selecting LED fixture models. More current levels can be set by NFC using mobile APP with 100-500mA adjustable in 1mA step

|                       |            |           |             |            |         |
|-----------------------|------------|-----------|-------------|------------|---------|
| <b>Output Current</b> | 100mA      | 150mA     | 200mA       | 250mA      | 300mA   |
| <b>Output Voltage</b> | 9-42Vdc    | 9-42Vdc   | 9-42Vdc     | 9-42Vdc    | 9-40Vdc |
| <b>Output Power</b>   | 0.9-4.2W   | 1.35-6.3W | 1.8-8.4W    | 2.25-10.5W | 2.7-12W |
| <b>Output Current</b> | 350mA      | 400mA     | 450mA       | 500mA      | /       |
| <b>Output Voltage</b> | 9-34Vdc    | 9-30Vdc   | 9-27Vdc     | 9-24Vdc    | /       |
| <b>Output Power</b>   | 3.15-11.9W | 3.6-12W   | 4.05-12.15W | 4.5-12W    | /       |

Protective Housing Application Diagram

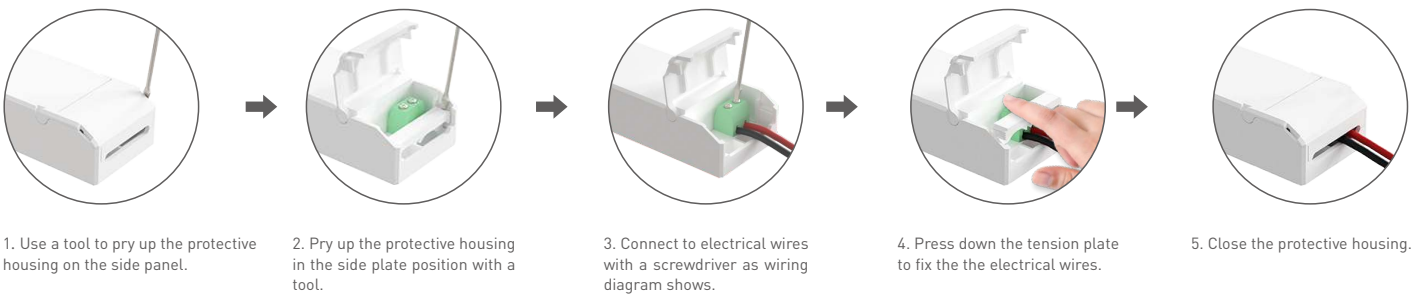

Installation Precautions

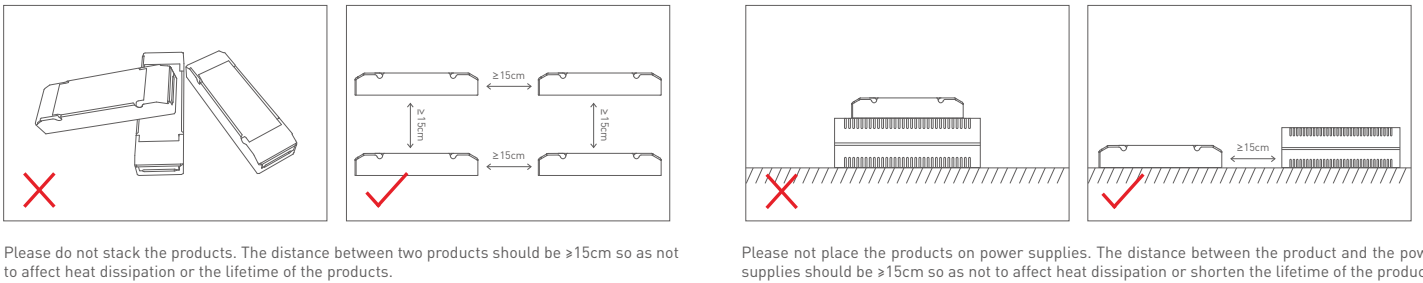

Note: The temperature within the installation area should be within the working temperature range of the products. Please do not install products inside LED fixtures to avoid temperature exceeding the working temperature that may affect the product lifetime.

## Use the NFC Lighting APP

Scan the QR code below with your mobile phone and follow the prompts to complete the APP installation (According to performance requirements, you need to use a NFC-capable Android phone, or an iPhone 8 and later that are compatible with iOS 13 or higher).



\* Before you begin setting the parameters of the driver, please make sure the driver is powered off.

### Read/Write the LED driver

Use your NFC-capable phone to read LED driver data, then edit the parameters and they can be directly written to the driver.

#### 1. Read the LED driver

On the APP home page, click [Read/Write LED driver], then keep the programmer's sensing area close to the NFC logo of the driver to read the driver parameters.





#### 2. Edit the parameters

Click [Parameter settings] to edit the advanced parameters, like output current, DMX address, brightness range, power-on fading time, etc.

#### 3. Write to the driver


After completing the parameter settings, click [Write] in the upper right corner, and keep the programmer's sensing area close to the NFC logo of the driver, so the parameters can be written to the driver.

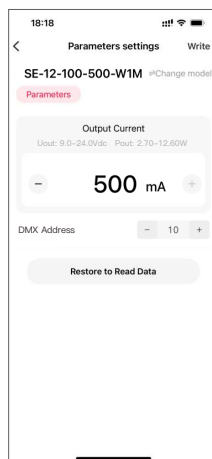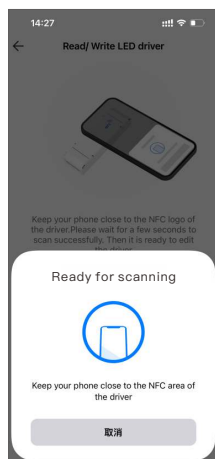

## Use with RDM Editor

The DMX driver can work with the address editor that complies with standard RDM protocol.


It is recommended to use LTECH's RDM editor (model WiFi-RDM01), which can achieve more functions such as remote browsing and parameter setting. Wiring diagram as below:

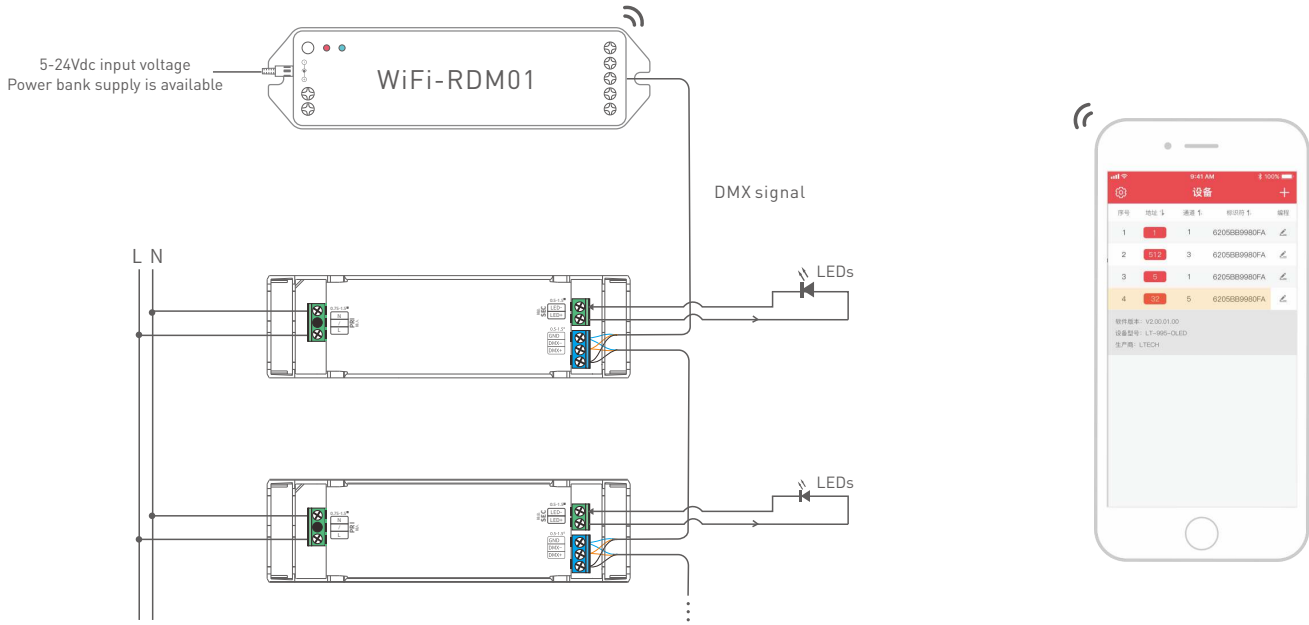


\* the defaulted DMX address of the driver is 1.

## LTECH RDM editor App interface instruction

Download the App, setting the parameters after well connecting the RDM editor, please check the manual of WiFi-RDM01 for more details.

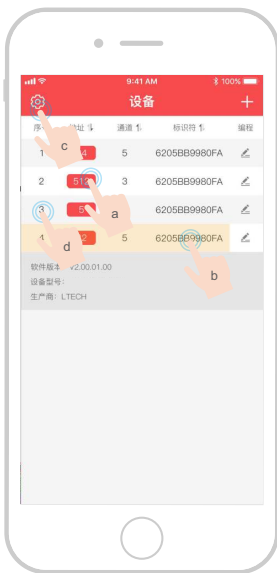

- a: Click "Add", edited the address in corresponding box.
- b: Click "ID", get more product details.
- c: Click "⚙️", enter setting interface.
- d: Click "No.", issue the recognizing command.




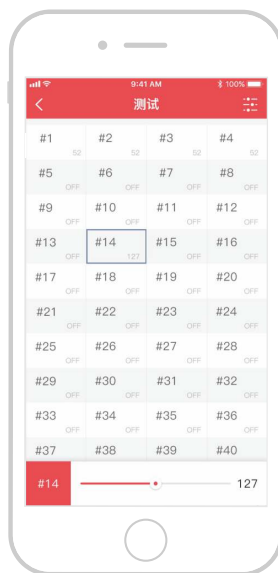


Test



DMX address setting

Relationship Diagrams

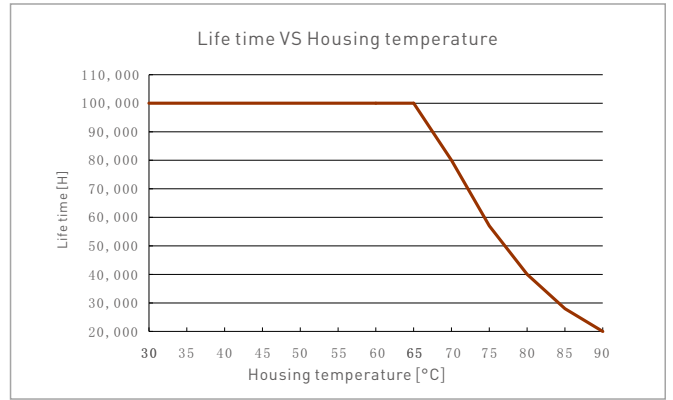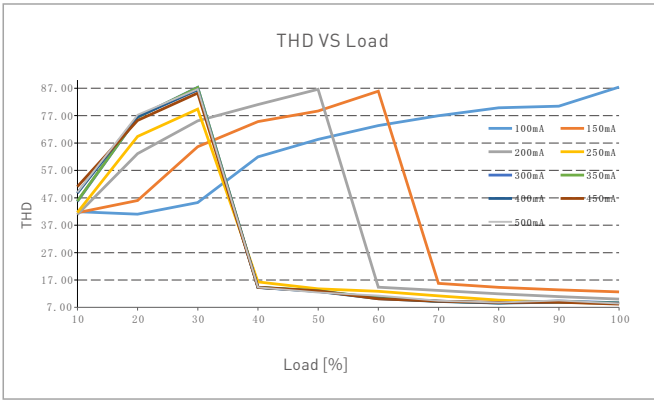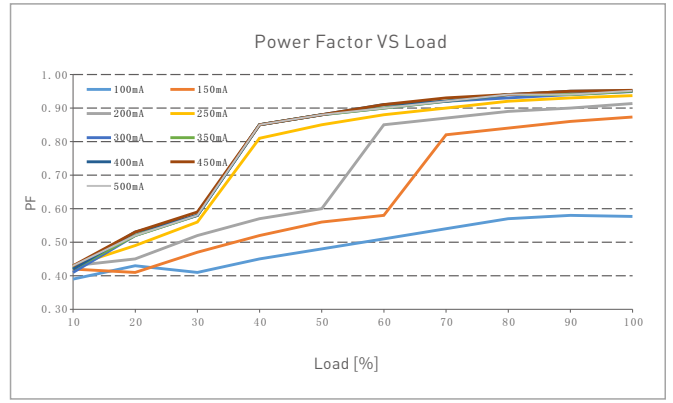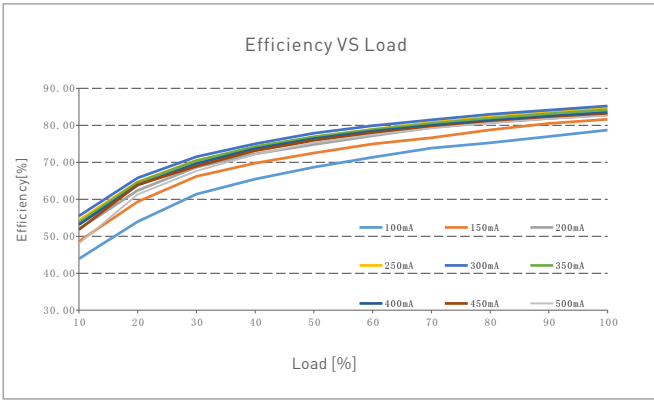

SE-12-100-500-W1M


Flicker Test Sheet

IEEE 1789

| Limit of modulation in low risk area  |   |
|---------------------------------------|---|
| Waveform frequency of optical output  | limit [%]                                       |
| $f < 8\text{Hz}$                      | 0.2   |
| $8\text{Hz} < f < 90\text{Hz}$        | $0.025 \times f$                                |
| $90\text{Hz} < f < 1250\text{Hz}$     | $0.08 \times f$                                 |
| $f > 1250\text{Hz}$                   | Exemption assessment                            |
| Limit of modulation in no effect area |   |
| Waveform frequency of optical output  | limit [%]                                       |
| $f < 10\text{Hz}$                     | 0.1   |
| $10\text{Hz} < f < 90\text{Hz}$       | $0.01 \times f$                                 |
| $90\text{Hz} < f < 3125\text{Hz}$     | $[0.08/2.5] \times f$                           |
| $f > 3125\text{Hz}$                   | Exemption assessment (High frequency exemption) |

Brightness

- ▲ 0.1%
- ◆ 1%
- ◆ 5%
- ◆ 10%
- 20%
- 30%
- 40%
- ★ 50%
- 60%
- 70%
- 80%
- ★ 90%
- ◆ 100%

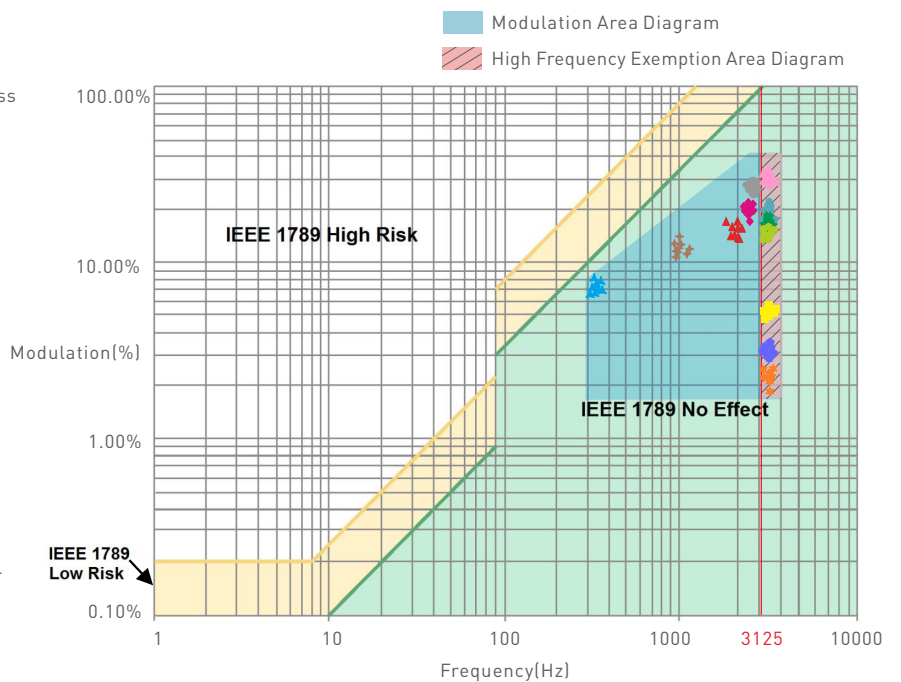

Marks in the right chart were tested results of different current ranges. The output frequency is 0Hz in 100% brightness and its corresponding modulation is 0%, which could not be shown in the right chart.

## Packaging Specifications

|                   |   |
|-------------------|---|
| Model             | SE-12-100-500-W1M                             |
| Carton Dimensions | 260×240×215mm(L×W×H)                          |
| Quantity          | 20 PCS/Layer; 5 Layers/Carton; 100 PCS/Carton |
| Weight            | 0.095 kg/PC; 9.5 kg±5%/Carton                 |

## Packaging Image



Inner Packaging Box



Carton Packaging

## Transportation and Storage

### 1. Transportation

Products can be shipped via vehicles, boats and planes.

During transportation, products should be protected from rain and sun. Please avoid severe shock and vibration during the loading and unloading process.

### 2. Storage

The storage conditions should comply with the Class I Environmental Standards. The products that have been stored for more than six months are recommended to be re-inspected and can be used only after they have been qualified.

## Attentions

- This product must be installed and adjusted by a qualified professional.
- LTECH products are and not lightningproof non-waterproof (special models excepted). Please avoid the sun and rain. When installed outdoors, please ensure they are mounted in a water proof enclosure or in an area equipped with lightning protection devices .
- Good heat dissipation will extend the life the product. Please install the product in a environment with good ventilation.
- When you install this product, please avoid being near a large area of metal objects or stacking them to prevent signal interference.
- Please keep the product away from a intense magnetic field, a high pressure area or a place where lightning is easy to occur.
- Please check whether the working voltage used complies with the parameter requirements of the product.
- Before you power on the product, please make sure all the wiring is correct in case of incorrect connection that may cause a short circuit and damage the components, or trigger a accident.
- If a fault occurs, please do not attempt to fix the product by yourself. If you have any question, please contact the supplier.

\* This manual is subject to changes without further notice. Product functions depend on the goods. Please feel free to contact our official distributors if you have any question.

## Warranty Agreement

- Warranty periods from the date of delivery: 2 years.
- Free repair or replacement services for quality problems are provided within warranty periods.

Warranty exclusions below:

- Beyond warranty periods.
- Any artificial damage caused by high voltage, overload, or improper operations.
- Products with severe physical damage.
- Damage caused by natural disasters and force majeure.
- Warranty labels and barcodes have been damaged.
- No any contract signed by LTECH.

1. Repair or replacement provided is the only remedy for customers. LTECH is not liable for any incidental or consequential damage unless it is within the law.
2. LTECH has the right to amend or adjust the terms of this warranty, and release in written form shall prevail.



**Update Log**

| Version | Updated Time | Update Content   | Updated by   |
|---------|--------------|------------------|--------------|
| A0      | 20231028     | Original version | Yang Weiling |